


Pate
Customer
Project
уре

Wink Asy Recessed 82 1x IP54 Spreadlight LED 2700K Wide Flood DE Black Structure



Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.





Specifications

Material	14202032		
Light Source Type	LED		
LED Type	BRIDGELUX V8G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	63 97 100	100 57	
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Input Voltage	Constant C	Current Driver Required	
Electrical Class	III		
IP Rating	54		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	ø98		
Mounting depth (mm)	100.0		
Adjustability	H 355°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Black, Structure		
Gross weight (g)	288.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	13,2	13,7	
Max. forward voltage (Vf)	15,0	15,4	
Connected load (W)	5,0	7,2	
Luminous flux per lamp (Im)	317	425	
Efficacy (Im/W)	63	59	
Glare rating	29	30	
Remark • This is not a complete product. Recessed Ring or Wink Flange required.			






TM30 & CRI diagram






Light distribution & beam diagram

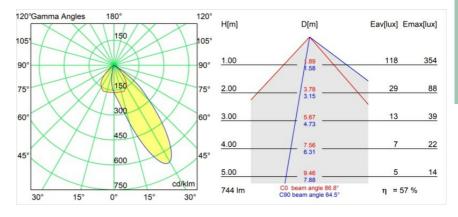



Installation Accessories



14203009 Ring Recessed 82 Wink White Structure14203032 Ring Recessed 82 Wink 1x Black Structure



14203030 Ring Recessed Trimless 110 1x

Choose a required accessory