


Date
Customer
Project
Type

Marbul Recessed Adjustable 115 2x LED 1800-3000K WD DE Black Structure



Specifications


Material	14222532
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 12W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	100 100 100 100 94
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø 108 (x 2) L 228
Mounting depth (mm)	100.0
Adjustability	H 360° V 45°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1798.0
Drive current (mA)	350
Min. forward voltage (Vf)	30,6
Max. forward voltage (Vf)	37,0
Connected load (W)	12,0
Luminous flux per lamp (lm)	955
Efficacy (lm/W)	79
Glare rating	14

Marbul is a timeless, spherical accent luminaire. Its pure geometrical shape makes it easily fit in every interior. Why designers love it so? The attention to detail and the simplicity of the shape present a minimalistic, elegant and versatile design for those looking to experiment with organic lighting.


Remark

- 4000K on request
 - Magnetic reflector not included
 - 4000K on request
 - This is not a complete product. Magnetic reflector required.
 - This is not a complete product. Magnetic reflector required.
-

TM30 & CRI diagram

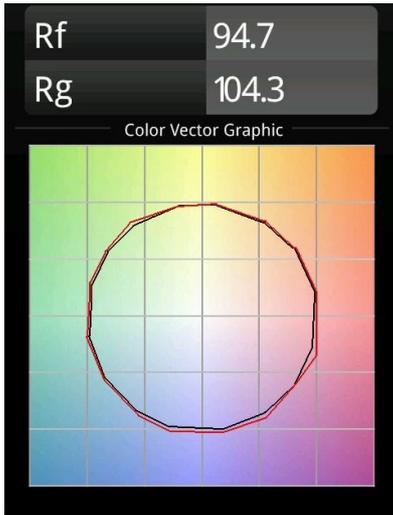

Light distribution & beam diagram

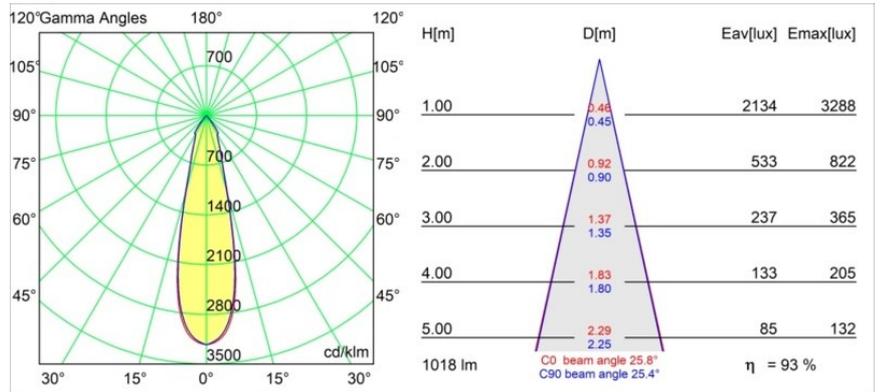


Diagrams

Optical Accessories

- 10219330 Reflector 82 Medium WD Aluminium Anodised
- 10219630 Reflector 82 Flood WD Gold Anodised
- 10219430 Reflector 82 Flood WD Aluminium Anodised
- 10219830 Reflector 82 Flood WD Champagne Anodised

Installation Accessories



10390130 Installation Housing 183x312x122

12291530 Plaster Kit 310x212 - 108x120 1x

Choose a required accessory