
 Date

 Customer


 Project

 Type

Rektor Track 230V Adjustable 78x78 1x LED 3000K Medium DALI DI Black Structure



With a name derived from the Latin word for “ruler”, the Rektor family has all the qualities of a leader. Strong, guiding, and arguably a good listener. Winner of the 2014 Henry Van de Velde design award, Rektor is an orientable downlighter that showcases the distinguished effects of right angles and accented light direction.

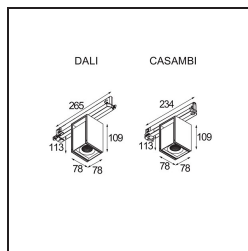


Specifications

Material	14270232
Light Source Type	LED
LED Type	BRIDGELUX VERO13
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	87 98 100 100 74
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	22.9
Input Voltage	230V
Luminaire power (W)	13.5
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V -90°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	838.0
Luminous flux per lamp (lm)	777
Efficacy (lm/W)	57
Glare rating	22
Remark	<ul style="list-style-type: none"> This is not a complete product. Track 230V system required.

TM30 & CRI diagram



Light distribution & beam diagram

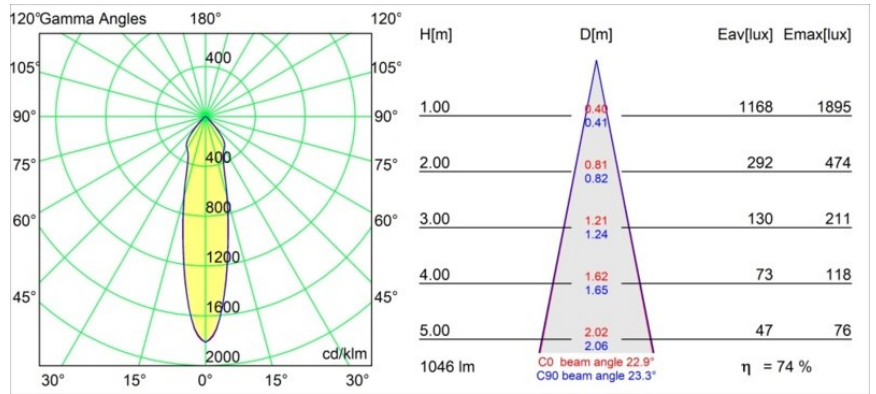

Diagrams