




Date \_\_\_\_\_  
Customer \_\_\_\_\_  
Project \_\_\_\_\_  
Type \_\_\_\_\_


*Rektor Track 230V Adjustable 78x78 1x LED 3000K Flood Casambi DI Black Structure*

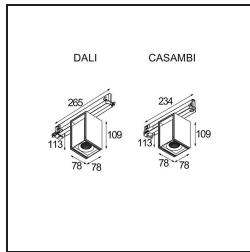

### Specifications

Material	14270932
Light Source Type	LED
LED Type	BRIDGELUX VERO13
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	87 98 100 100 74
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	38.6
Input Voltage	230V
Luminaire power (W)	14.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Casambi
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V -90°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Smart Lighting	Casambi
Gross weight (g)	817.0
Luminous flux per lamp (lm)	765
Efficacy (lm/W)	54
Glare rating	21
Remark	• This is not a complete product. Track 230V system required.

With a name derived from the Latin word for “ruler”, the Rektor family has all the qualities of a leader. Strong, guiding, and arguably a good listener. Winner of the 2014 Henry Van de Velde design award, Rektor is an orientable downlighter that showcases the distinguished effects of right angles and accented light direction.

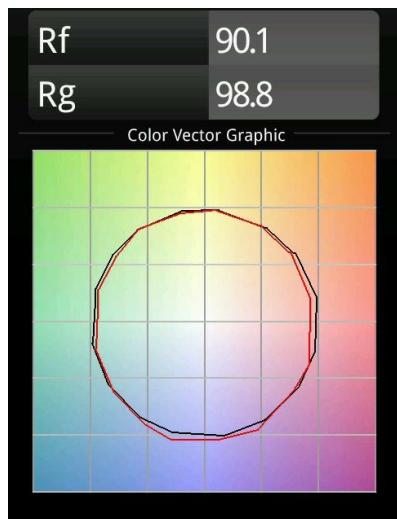**TM30 & CRI diagram**

**Light distribution & beam diagram**
