


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

Extruded Track 48V Suspended 46 600 1x LED 2700K Flood 1-10V Grey White Structure - Grey White Matt



This statement luminaire loves to play with light when it's on and when it's off. Its strong lines bring vertical structure to your space. The grooves along the shaft tell a different tale, every time the surrounding light changes. A cone-shape lampshade offers glare-free, intimate, accent light. Extruded is made for exchange. People to people, light to shadow.




Specifications

|                                     |   |
|-------------------------------------|---|
| Material                            | 13690636  |
| Light Source Type                   | LED   |
| LED Type                            | BRIDGELUX V6 HD G7  |
| LED technology                      | LED COB   |
| CRI                                 | Min. 90   |
| Colour Temperature                  | 2700K   |
| Lifetime                            | L80B10 @50,000 Hours  |
| Lamp Included                       | Yes   |
| Number of Light Sources             | 1   |
| CIE flux code                       | 98 100 100 100 77   |
| Binning (SDCM)                      | 2   |
| Light Direction                     | Down  |
| Optic                               | Reflector   |
| Measured beam angle (°)             | 42.3  |
| Input Voltage                       | 48Vdc   |
| Luminaire power (W)                 | 8.5   |
| Electrical Class                    | III   |
| IP Rating                           | 20  |
| Glow wire rating (°C)               | 960   |
| Dimming Protocol                    | 1-10V   |
| Indoor/Outdoor                      | Indoor  |
| Application                         | Ceiling   |
| Mounting                            | Suspended   |
| Distance to Lighted Object (m)      | 0,1   |
| Primary Colour & Primary Finish     | Grey White, Structure   |
| Secondary Colour & Secondary Finish | Grey White, Matt  |
| Gross weight (g)                    | 1910.0  |
| Delivered lumens (lm)               | 740   |
| Efficacy (lm/W)                     | 87  |
| Glare rating                        | 24  |
| Remark                              | <ul style="list-style-type: none"> <li>This is not a complete product. Pista track 48V system required.</li> <li>For installations without dimmer, it is recommended to use 1-10 V luminaires.</li> </ul> |

TM30 &amp; CRI diagram



Light distribution &amp; beam diagram

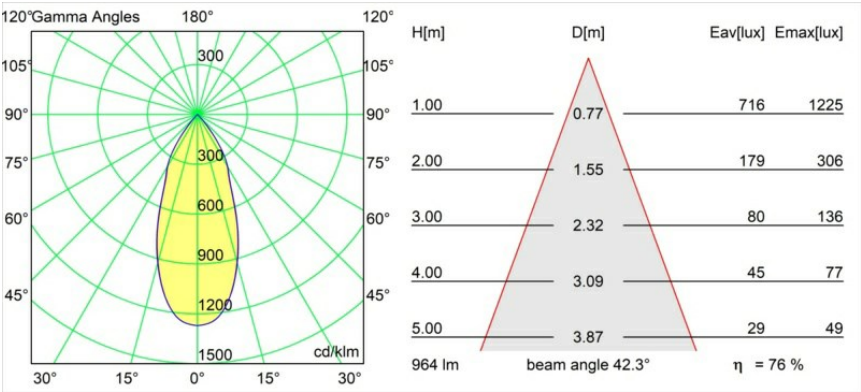

Diagrams