

Date
Customer
Project
Type

## Extruded Track 48V Suspended 46 300 1x LED 2700K Flood DALI Bronze Anodised - Bronze Brushed Anodised



This statement luminaire loves to play with light when it's on and when it's off. Its strong lines bring vertical structure to your space. The grooves along the shaft tell a different tale, every time the surrounding light changes. A cone-shape lampshade offers glare-free, intimate, accent light. Extruded is made for exchange. People to people, light to shadow.



### Specifications

Material	13690327
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 73
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	41.8
Input Voltage	48Vdc
Luminaire power (W)	8.5
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Bronze, Anodised
Secondary Colour & Secondary Finish	Bronze, Brushed Anodised
Gross weight (g)	1280.0
Luminous flux per lamp (lm)	708
Efficacy (lm/W)	83
Glare rating	23
Remark	<ul style="list-style-type: none"> <li>This is not a complete product. Pista track 48V system required.</li> <li>For installations without dimmer, it is recommended to use 1-10 V luminaires.</li> </ul>



**MODULAR**  
LIGHTING —  
INSTRUMENTS


*Extruded Track 48V Suspended 46 300 lx LED 2700K Flood*  
*DALI Bronze Anodised - Bronze Brushed Anodised*

---

TM30 & CRI diagram



Light distribution & beam diagram

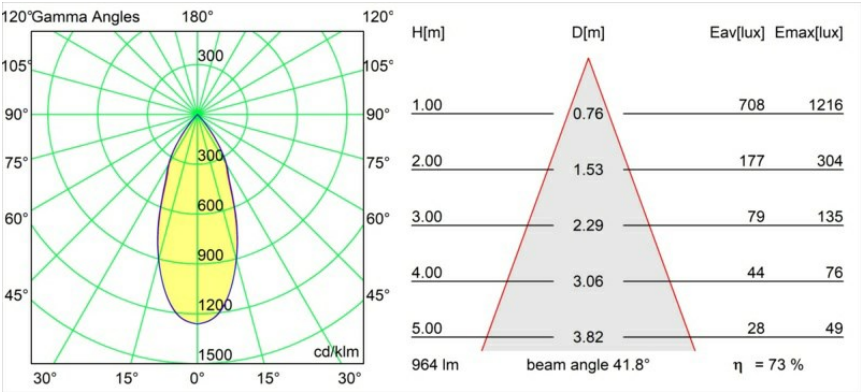

Diagrams