



*Extruded Track 48V Suspended 46 300 1x LED 2700K Flood DALI Blue Anodised - Blue Brushed Anodised*

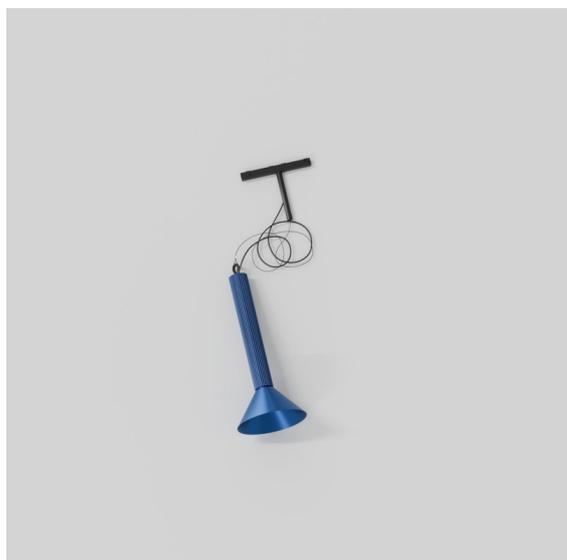

This statement luminaire loves to play with light when it's on and when it's off. Its strong lines bring vertical structure to your space. The grooves along the shaft tell a different tale, every time the surrounding light changes. A cone-shape lampshade offers glare-free, intimate, accent light. Extruded is made for exchange. People to people, light to shadow.



### Specifications



|                                     |                        |
|-------------------------------------|------------------------|
| Material                            | 13690340               |
| Light Source Type                   | LED                    |
| LED Type                            | BRIDGELUX V6 HD G8     |
| LED technology                      | LED COB                |
| CRI                                 | Min. 90                |
| Colour Temperature                  | 2700K                  |
| Lifetime                            | L80B10 @50,000 Hours   |
| Lamp Included                       | Yes                    |
| Number of Light Sources             | 1                      |
| CIE flux code                       | 99 100 100 100 71      |
| Binning (SDCM)                      | 2                      |
| Light Direction                     | Down                   |
| Optic                               | Reflector              |
| Measured beam angle (°)             | 43.9                   |
| Input Voltage                       | 48Vdc                  |
| Luminaire power (W)                 | 8.5                    |
| Electrical Class                    | III                    |
| IP Rating                           | 20                     |
| Glow wire rating (°C)               | 960                    |
| Dimming Protocol                    | DALI                   |
| DALI Standard                       | DALI-2                 |
| Indoor/Outdoor                      | Indoor                 |
| Application                         | Ceiling                |
| Mounting                            | Suspended              |
| Distance to Lighted Object (m)      | 0,1                    |
| Primary Colour & Primary Finish     | Blue, Anodised         |
| Secondary Colour & Secondary Finish | Blue, Brushed Anodised |
| Gross weight (g)                    | 1280.0                 |
| Luminous flux per lamp (lm)         | 686                    |
| Efficacy (lm/W)                     | 81                     |
| Glare rating                        | 23                     |

---

Remark

- This is not a complete product. Pista track 48V system required.
  - For installations without dimmer, it is recommended to use 1-10 V luminaires.
-

**TM30 & CRI diagram**

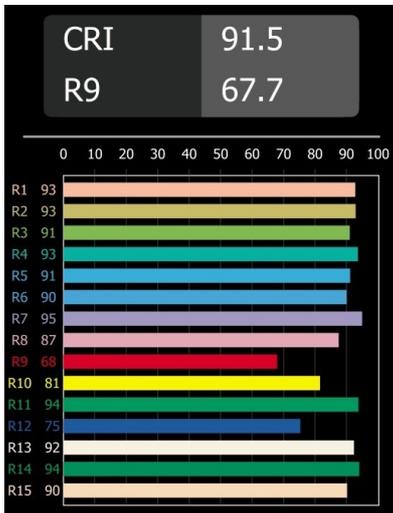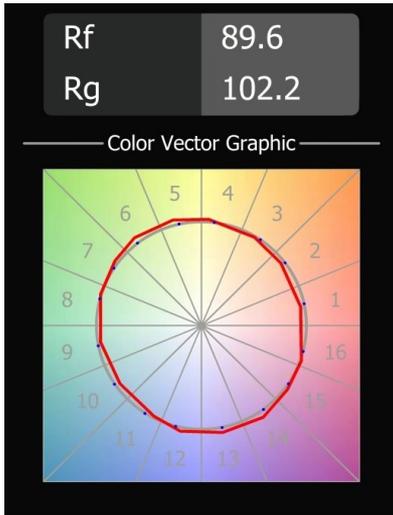

**Light distribution & beam diagram**

