


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

*Extruded Track 48V Suspended 46 600 1x LED 1800-3000K WD Flood 1-10V Champagne Anodised - Champagne
Brushed Anodised*



This statement luminaire loves to play with light when it's on and when it's off. Its strong lines bring vertical structure to your space. The grooves along the shaft tell a different tale, every time the surrounding light changes. A cone-shape lampshade offers glare-free, intimate, accent light. Extruded is made for exchange. People to people, light to shadow.



Specifications

| | |
|-------------------------------------|--|
| Material | 13690834 |
| Light Source Type | LED |
| LED Type | BRIDGELUX WARMDIM 6W |
| LED technology | LED COB |
| CRI | Min. 95 |
| Colour Temperature | 1800-3000K (Warm Dim) |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 98 100 100 100 80 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 45.4 |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 6.0 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Suspended |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Champagne, Anodised |
| Secondary Colour & Secondary Finish | Champagne, Brushed Anodised |
| Gross weight (g) | 1910.0 |
| Delivered lumens (lm) | 403 |
| Efficacy (lm/W) | 67 |
| Glare rating | 22 |
| Remark | <ul style="list-style-type: none">• This is not a complete product. Pista track 48V system required.• For installations without dimmer, it is recommended to use 1-10 V luminaires. |



MODULAR
LIGHTING —
INSTRUMENTS

Extruded Track 48V Suspended 46 600 lx LED 1800-3000K WD


Flood 1-10V Champagne Anodised - Champagne Brushed

Anodised

TM30 & CRI diagram



Light distribution & beam diagram

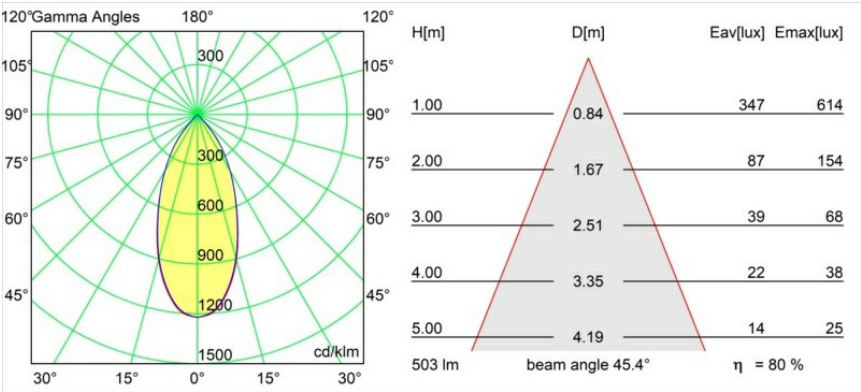

Diagrams