


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

*Extruded Track 48V Suspended 46 600 1x LED 1800-3000K WD Flood 1-10V Champagne Anodised - Black Brushed*  
*Anodised*



This statement luminaire loves to play with light when it's on and when it's off. Its strong lines bring vertical structure to your space. The grooves along the shaft tell a different tale, every time the surrounding light changes. A cone-shape lampshade offers glare-free, intimate, accent light. Extruded is made for exchange. People to people, light to shadow.



### Specifications

|                                     |  |
|-------------------------------------|--|
| Material                            | 13690831   |
| Light Source Type                   | LED  |
| LED Type                            | BRIDGELUX WARMDIM 6W   |
| LED technology                      | LED COB  |
| CRI                                 | Min. 95  |
| Colour Temperature                  | 1800-3000K (Warm Dim)  |
| Lifetime                            | L80B10 @50,000 Hours   |
| Lamp Included                       | Yes  |
| Number of Light Sources             | 1  |
| CIE flux code                       | 98 100 100 100 77  |
| Binning (SDCM)                      | 3  |
| Light Direction                     | Down   |
| Optic                               | Reflector  |
| Measured beam angle (°)             | 46.1   |
| Input Voltage                       | 48Vdc  |
| Luminaire power (W)                 | 6.0  |
| Electrical Class                    | III  |
| IP Rating                           | 20   |
| Glow wire rating (°C)               | 960  |
| Dimming Protocol                    | 1-10V  |
| Indoor/Outdoor                      | Indoor   |
| Application                         | Ceiling  |
| Mounting                            | Suspended  |
| Distance to Lighted Object (m)      | 0,1  |
| Primary Colour & Primary Finish     | Champagne, Anodised  |
| Secondary Colour & Secondary Finish | Black, Brushed Anodised  |
| Gross weight (g)                    | 1910.0   |
| Delivered lumens (lm)               | 388  |
| Efficacy (lm/W)                     | 65   |
| Glare rating                        | 22   |
| Remark                              | <ul style="list-style-type: none"><li>• This is not a complete product. Pista track 48V system required.</li><li>• For installations without dimmer, it is recommended to use 1-10 V luminaires.</li></ul> |




**MODULAR**  
LIGHTING —  
INSTRUMENTS


*Extruded Track 48V Suspended 46 600 lx LED 1800-3000K WD*  
*Flood 1-10V Champagne Anodised - Black Brushed Anodised*

---

TM30 &amp; CRI diagram

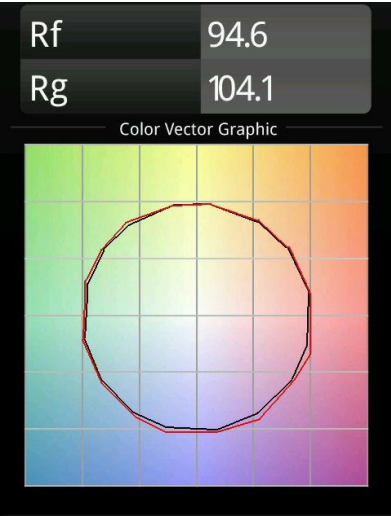

Light distribution &amp; beam diagram

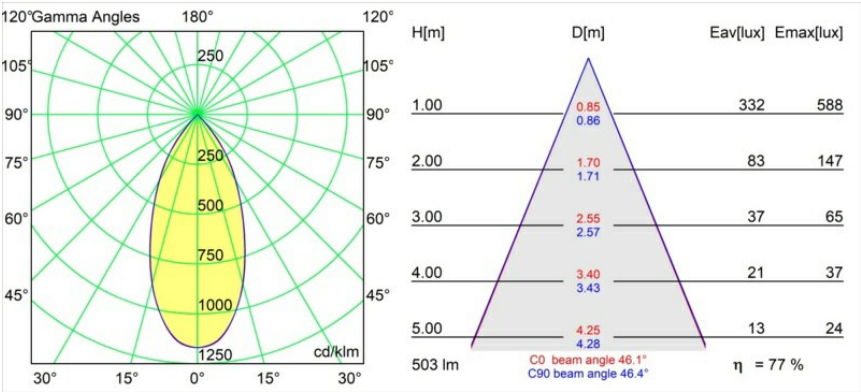

Diagrams