


Date
Customer
Project
Type

FFD_Medard Semi-Recessed Adjustable 70 1x LED 1800-3000K WD Flood DE Black Structure



The quirky long legs of the praying mantis inspired the Dutch Basten Leijh Design Studio for the creation of Medard, its initial design being a stylish table lamp. Now a large, versatile family of accent lights, and a lot of flexibility, Medard opens into a multitude of elegant applications.

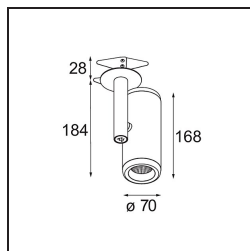

Specifications

Material	12734532
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 12W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 83
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	37.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Semi-Recessed
Cut-out size (mm)	ø65
Mounting depth (mm)	80.0
Adjustability	H 355° V 360°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	987.0
Drive current (mA)	350
Min. forward voltage (Vf)	30,6
Max. forward voltage (Vf)	37,0
Connected load (W)	12,0
Luminous flux per lamp (lm)	821
Efficacy (lm/W)	68
Glare rating	17


Remark

- 4000K on request
-

TM30 & CRI diagram



Light distribution & beam diagram

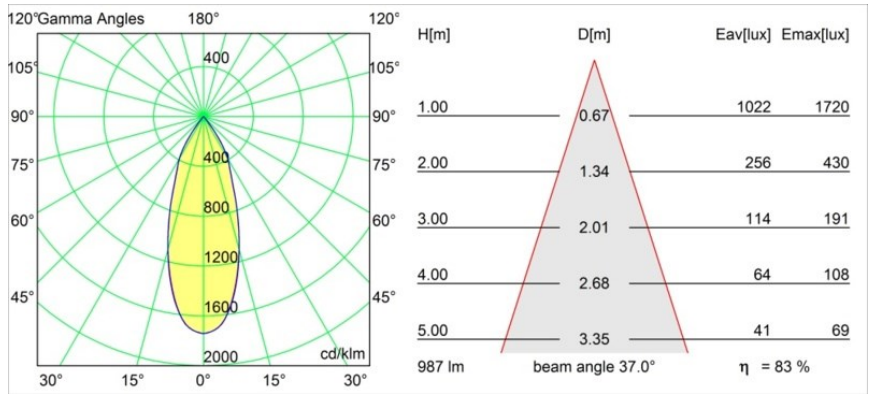

Diagrams

Installation Accessories



10490330 Installation Housing 172x112x100



12291330 Plaster Kit 170x112 - 65 1x

Choose a required accessory