Date	
Customer	
Project	
Type	

SLD75 LEDline 7x LED 4000K Wide Flood DALI/Push-Dim DI Preset 35% + Lens 80

Friends of hue
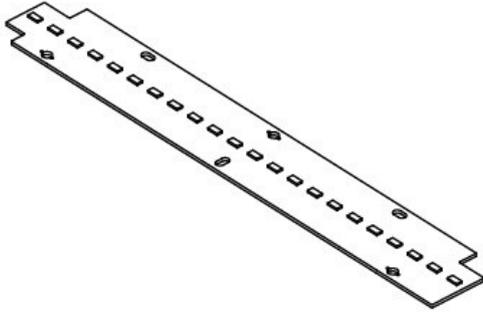
Specifications

Material	98559107
Light Source Type	LED
LED Type	FORTIMO LEDLINE CREE PRO9 J-SERIES
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	4000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	7
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
Electrical Class	I
IP Rating	20
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Distance to Lighted Object (m)	0,1
Gross weight (g)	0.001

Diagrams

TM30 & CRI diagram

Rf	89.4
Rg	98.1

Color Vector Graphic

CRI	92.8
R9	51.9

		0 10 20 30 40 50 60 70 80 90 100
R1	94	
R2	98	
R3	99	
R4	93	
R5	94	
R6	96	
R7	89	
R8	78	
R9	52	
R10	94	
R11	95	
R12	82	
R13	95	
R14	99	
R15	89	