MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Minude Semi-Recessed Adjustable 45 1x LED 2700K Spot DE Champagne Brushed Anodised

La flexibilidad yóguica de Minude le sorprenderá tanto como su diseño cilíndrico desnudo. Exprese apariencia y sensación elegantes y minimalistas en paredes y en techos altos o bajos. Use más de un foco Minude en nuestra vía Pista Track o en nuestro Modupoint LED rediseñado. Su larga tira de colores y tamaño en miniatura causarán gran impresión.



Specifications

Material	13710841	
Tipo de fuente de luz	LED	
Tipo de LED	CITIZEN CLU7A3	
Tecnología LED	COB LED	
CRI	Min. 90	
Temperatura del color	2700K	
Vida Util	L90B10 @50.000 horas	
Lámpara Incluida	Sí	
Número de fuentes de luz	1	
Código de flujo CIE	98 100 100 100 39	
Binning (SDCM)	2	
Dirección de la luz	Directo	
Óptica	Lente	
Ángulo de Apertura medido (°)	16,0	
Voltaje de entrada	Driver de corriente constante requerido	
Clasificacion eléctrica	III	
Clasificación del IP	20	
Clasificación de hilo incandescente (°C)	960	
Interio/Exterior	Interior	
Aplicación	Techo, Pared	
Montaje	Semi-Empotrado	
Tamaño de corte (mm)	ø40	
Profundidad de montaje (mm)	110,0	
Ajustabilidad	H 360° V 0°/+90°	
Distancia al objeto iluminado (m)	0,1	
Color principal & Acabado principal	Champán, Anodizado cepillado	
Peso bruto (g)	324,0	
Corriente de accionamiento (mA)	350	500
Min. forward voltage (Vf)	11,2	11,2
Max. forward voltage (Vf)	13,2	13,2
Connected load (W)	4,1	6,1
Flujo luminoso por lámpara (lm)	191	259
Eficacia (lm/W)	47	42

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-24, 12:37:43 PM - ©Modular Lighting Instruments

Índice de deslumbramiento	7	8
Remark	• 3500K y 4000K bajo pedido	

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-24, 12:37:43 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

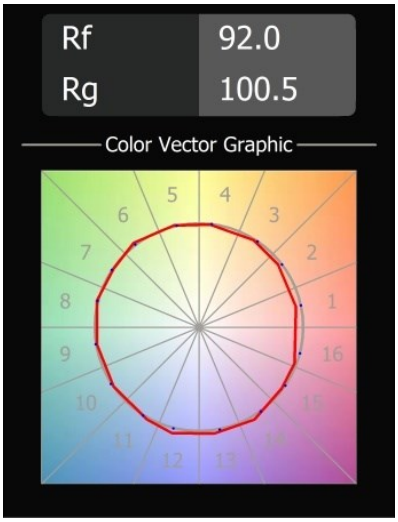

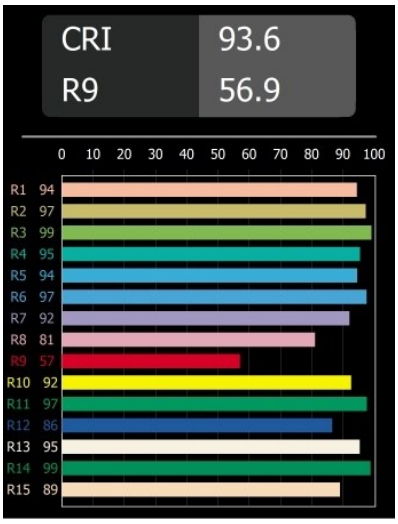

Light distribution & beam diagram

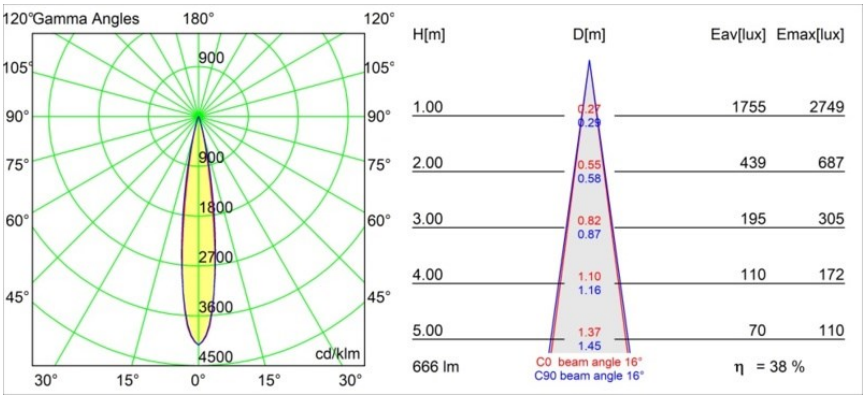

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-24, 12:37:43 PM - ©Modular Lighting Instruments

Accesorios Instalación



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-24, 12:37:43 PM - ©Modular Lighting Instruments