


Pate
Customer
Project
уре

Minude Semi-Recessed Adjustable 45 1x LED 2700K Spot DE Bronze Brushed Anodised



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.





a			c·			
Ν	ne	C11	11C	ati	10	ns
\sim $_{I}$	ρ •	٠.,	•	•		

Material	13710882				
Light Source Type	LED				
LED Type	CITIZEN CLU7A3				
LED technology	LED COB				
CRI	Min. 90				
Colour Temperature	2700K				
Lifetime	L90B10 @50,000 Hours				
Lamp Included	Yes				
Number of Light Sources	1				
CIE flux code	100 100 100 100 39				
Binning (SDCM)	2				
Light Direction	Down				
Optic	Lens				
Measured beam angle (°)	16.0				
Input Voltage	Constant Current Driver Required				
Electrical Class	III				
IP Rating	20				
Glow wire rating (°C)	960				
Indoor/Outdoor	Indoor				
Application	Ceiling, Wall				
Mounting	Semi-Rece	Semi-Recessed			
Cut-out size (mm)	ø40				
Mounting depth (mm)	110.0				
Adjustability	H 360° V 0°/+90°				
Distance to Lighted Object (m)	0,1				
Primary Colour & Primary Finish					
Gross weight (g)	324.0				
Drive current (mA)	350	500			
Min. forward voltage (Vf)	11,2	11,2			
Max. forward voltage (Vf)	13,2	13,2			
Connected load (W)	4,1	6,1			
Luminous flux per lamp (lm)	194	262			
Efficacy (Im/W)	47	43			
Glare rating	1	1			




TM30 & CRI diagram






Light distribution & beam diagram

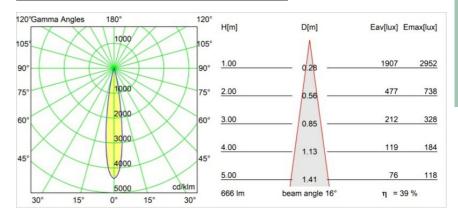




Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory