



Pate
Customer
Project
уре

Chival Wall Up/Down 292 2x LED 2700K DE Grey White Structure

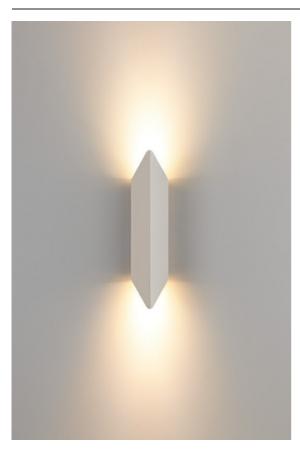

Formed by one single, pleated plate, Chival shows elements of sharp design and refined craftsmanship. Its up and down vertical light is a natural continuation of the shape, which was inspired by medieval coats of arms. Alone, Chival is beautiful and timeless. Try two or more, and you'll see a conversation of shadow, light and patterns taking shape.





Specifications			
Material	13760636		
Light Source Type	LED		
LED Type	CREE 1304		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	2		
CIE flux code	87 94 98 50 69		
Binning (SDCM)	2		
Light Direction	Up/Down		
Optic	Collimator		
Measured beam angle (°)	34.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Wall		
Mounting	Surface		
Adjustability	Not Applicable		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Grey White	e, Structure	
Gross weight (g)	370.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	7,5	7,8	
Max. forward voltage (Vf)	9,5	9,8	
Connected load (W)	3,0	4,4	
Luminous flux per lamp (lm)	528	713	
Efficacy (Im/W)	88	81	
Glare rating	28	29	



TM30 & CRI diagram





Light distribution & beam diagram

