



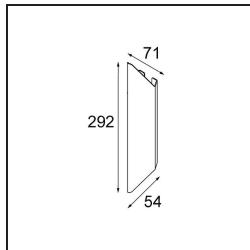

Date _____
Customer _____
Project _____
Type _____


Chival Wall Up/Down 292 2x LED 2700K DE Grey White Structure

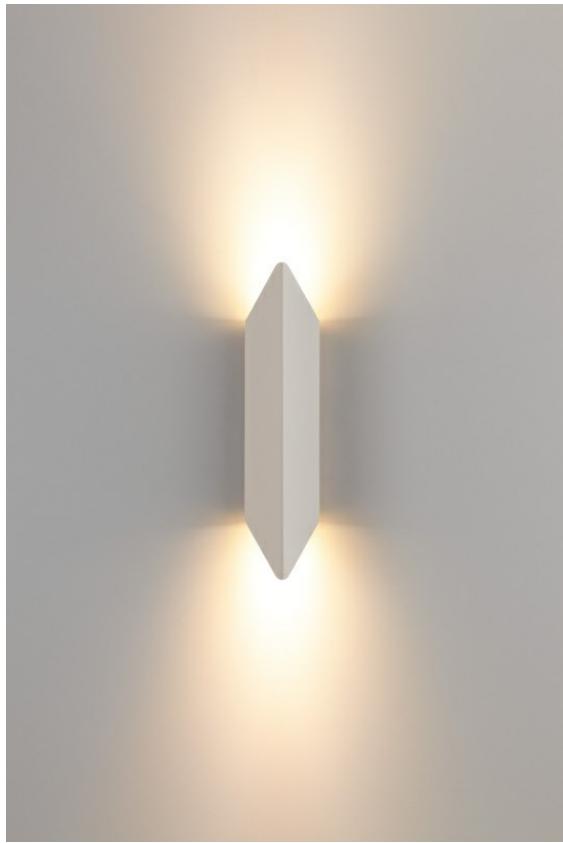

Specifications

Material	13760636
Light Source Type	LED
LED Type	CREE 1304
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	87 94 98 50 69
Binning (SDCM)	2
Light Direction	Up/Down
Optic	Collimator
Measured beam angle (°)	34.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Grey White, Structure
Gross weight (g)	370.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	7,5 7,8
Max. forward voltage (Vf)	9,5 9,8
Connected load (W)	3,0 4,4
Luminous flux per lamp (lm)	528 713
Efficacy (lm/W)	88 81
Glare rating	28 29

Formed by one single, pleated plate, Chival shows elements of sharp design and refined craftsmanship. Its up and down vertical light is a natural continuation of the shape, which was inspired by medieval coats of arms. Alone, Chival is beautiful and timeless. Try two or more, and you'll see a conversation of shadow, light and patterns taking shape.

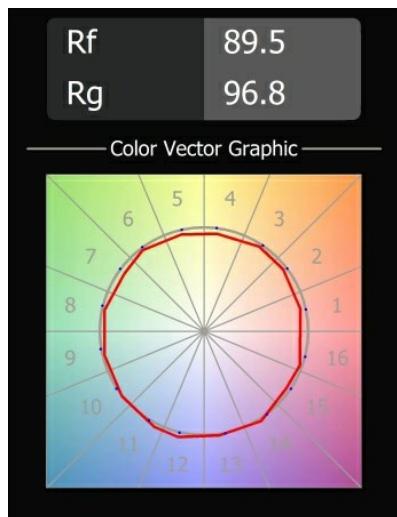TM30 & CRI diagram

Light distribution & beam diagram
