


Pate
Customer
Project
уре

Minude Semi-Recessed Adjustable 45 1x LED 3000K Medium DE Cast Grey Matt



Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.





a			c·			
Ν	ne	C11	1.C	at.	10	ns
\sim	ρ -	٠.,	-	000		

Material	11461104				
Light Source Type	LED				
LED Type	BRIDGELUX V6 HD G7				
LED technology	LED COB				
CRI	Min. 90				
Colour Temperature	3000K				
Lifetime	L80B10 @50,000 Hours				
Lamp Included	Yes				
Number of Light Sources	1				
CIE flux code	100 100 100 100 66				
Binning (SDCM)	2				
Light Direction	Down				
Optic	Lens				
Measured beam angle (°)	29.0				
Input Voltage	Constant Current Driver Required				
Electrical Class	III				
IP Rating	20				
Glow wire rating (°C)	960				
Indoor/Outdoor	Indoor				
Application	Ceiling, Wall				
Mounting	Semi-Recessed				
Cut-out size (mm)	ø40				
Mounting depth (mm)	110.0				
Adjustability	H 360° V 0°/+90°				
Distance to Lighted Object (m)	0,1				
Primary Colour & Primary Finish	Cast Grey, Matt				
Gross weight (g)	314.0				
Drive current (mA)	350	500			
Min. forward voltage (Vf)	14,8	15,2			
Max. forward voltage (Vf)	18,0	18,6			
Connected load (W)	5,7	8,5			
Luminous flux per lamp (lm)	484	653			
Efficacy (Im/W)	85	77			
Glare rating	0	0			




TM30 & CRI diagram






Light distribution & beam diagram

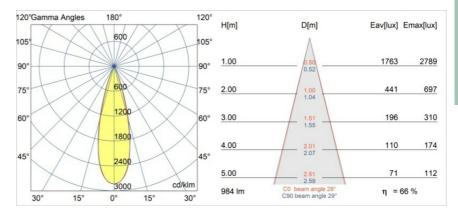




Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory