MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Nyto Semi-Recessed Adjustable 40 1x LED 2700K Medium DE White Structure



Very subtle, Nyto allows you to add a personal touch to the space or match an existing shade in the interior. With plenty of lighting, colour and application options, Nyto is ideal for many places and spaces.



Specifications

Material	13835109	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	99 100 100 100 79	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Collimator	
Measured beam angle (°)	31.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Semi-Recessed	
Cut-out size (mm)	ø40	
Mounting depth (mm)	110.0	
Adjustability	H 360° V 0°/+90°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Structure	
Gross weight (g)	223.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	15,4	15,8
Max. forward voltage (Vf)	18,8	19,4
Connected load (W)	6,0	8,8
Luminous flux per lamp (lm)	577	780
Efficacy (lm/W)	96	89
Glare rating	13	14

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-11-28, 12:00:25 PM - ©Modular Lighting Instruments

Remark	• This product comes in different Direct Custom options. Discover them all on the Modular Custom web page or ask for a quote.

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-11-28, 12:00:25 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

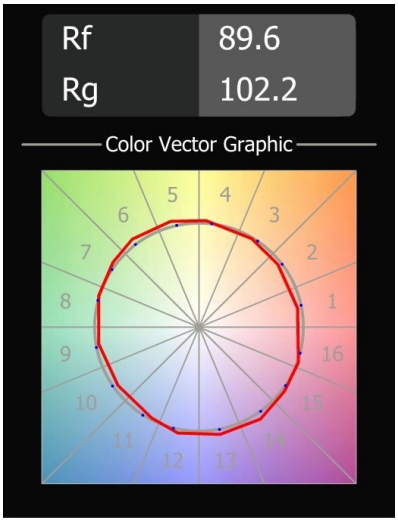

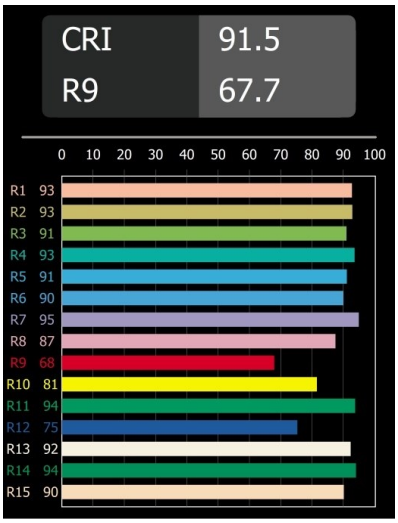

Light distribution & beam diagram

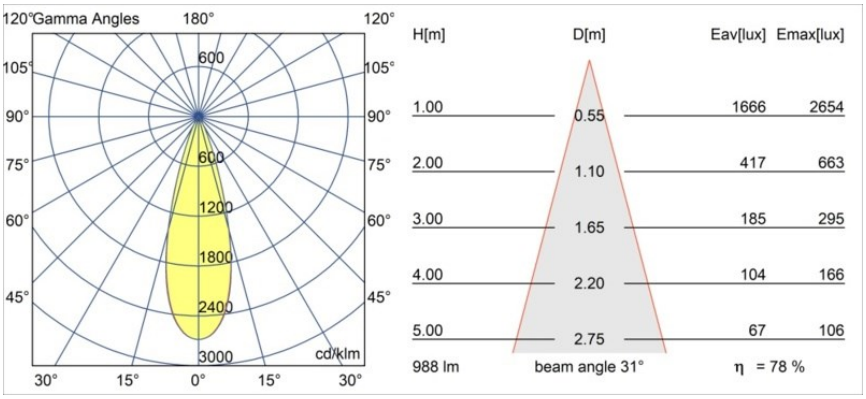

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-11-28, 12:00:25 PM - ©Modular Lighting Instruments

Optical Accessories



10223032 Honeycomb 28 Black

Installation Accessories



12293130 Plaster Kit 100x120-40 1x



10889530 Installation Housing 123x100x80

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-11-28, 12:00:25 PM - ©Modular Lighting Instruments