


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

M-LED Module 111 1x LED 3000K Medium DE Aluminium Brushed Anodised

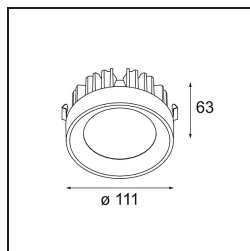


Specifications

| | |
|---------------------------------|----------------------------------|
| Material | 11298424 |
| Light Source Type | LED |
| LED Type | BRIDGELUX VERO13 G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 95 100 100 100 84 |
| Binning (SDCM) | 2 |
| Optic | Reflector |
| Measured beam angle (°) | 24.0 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Aluminium, Brushed Anodised |
| Gross weight (g) | 474.0 |
| Drive current (mA) | 350 500 700 |
| Min. forward voltage (Vf) | 28.3 29.0 29.7 |
| Max. forward voltage (Vf) | 32.9 33.6 34.5 |
| Connected load (W) | 10.7 15.7 22.5 |
| Luminous flux per lamp (lm) | 1238 1689 2209 |
| Efficacy (lm/W) | 116 108 98 |
| Glare rating | 20 20 21 |

TM30 & CRI diagram



Light distribution & beam diagram

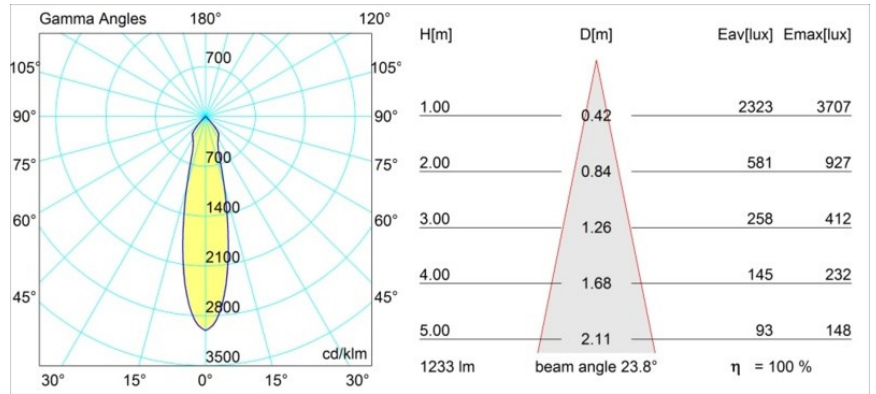

Diagrams