
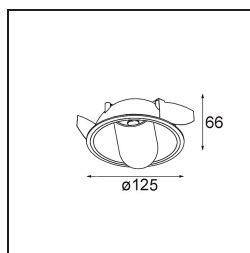


Hollow Recessed Adjustable 125 1x LED 3000K Medium DE Gold Matt - Gold Matt

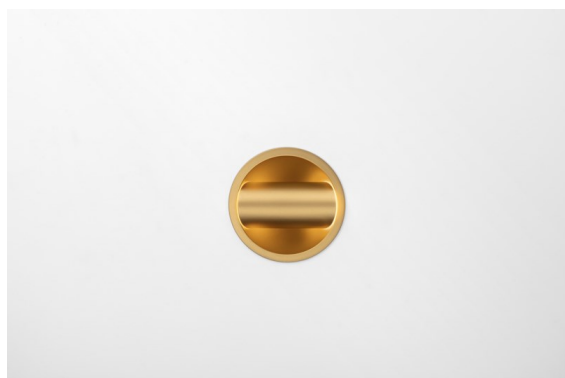

Hollow proposes direct light when open and indirect light when closed. But where does the light come from? Lit or dark, there and not there. A symphony of opposites, Hollow is a downlighter that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality.


Specifications

Material	12171187
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	91 99 100 100 48
Binning (SDCM)	2
Optic	Lens
Measured beam angle (°)	22.1
Input Voltage	Constant Current Driver Required
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø117
Mounting depth (mm)	70.0
Adjustability	H 360° V 90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Gold, Matt
Secondary Colour & Secondary Finish	Gold, Matt
Gross weight (g)	335.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	14,8 15,2
Max. forward voltage (Vf)	18,0 18,6
Connected load (W)	5,7 8,5
Luminous flux per lamp (lm)	349 470
Efficacy (lm/W)	61 55
Glare rating	14 15

TM30 & CRI diagram




Light distribution & beam diagram

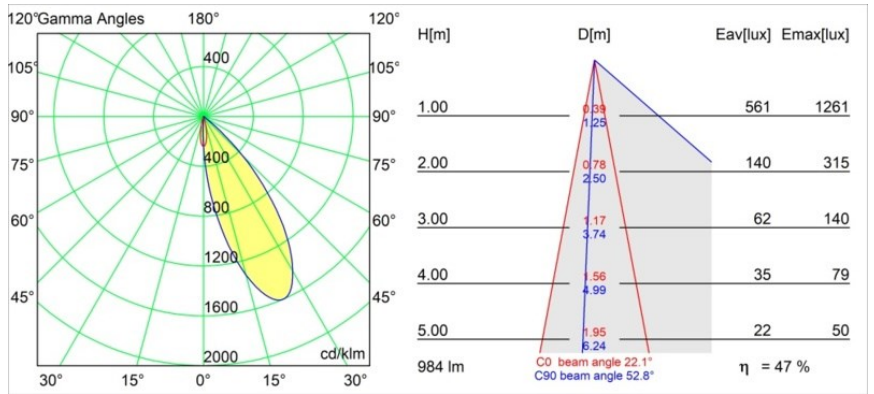


Diagrams

Installation Accessories

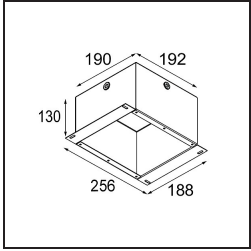

10889830 Installation Housing 192x190x130

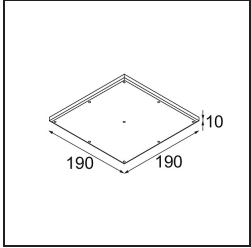

12292830 Gypsum Fibreboard 190x190

Choose a required accessory