


Date
Customer
Project
Type

Medard Semi-Recessed Adjustable 70 1x LED 2700K Medium DE Black Structure




The quirky long legs of the praying mantis inspired the Dutch Basten Leijh Design Studio for the creation of Medard, its initial design being a stylish table lamp. Now a large, versatile family of accent lights, and a lot of flexibility, Medard opens into a multitude of elegant applications.




Specifications

Material	12736032	
Light Source Type	LED	
LED Type	BRIDGELUX VERO13	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 88	
Binning (SDCM)	3	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	25.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Semi-Recessed	
Cut-out size (mm)	ø65	
Mounting depth (mm)	80.0	
Adjustability	H 355° V 360°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Structure	
Gross weight (g)	986.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	29,1	29,9
Max. forward voltage (Vf)	33,7	34,7
Connected load (W)	11,0	16,2
Delivered lumens (lm)	936	1285
Efficacy (lm/W)	85	79
Glare rating	16	17
Remark	• 4000K on request	

TM30 & CRI diagram

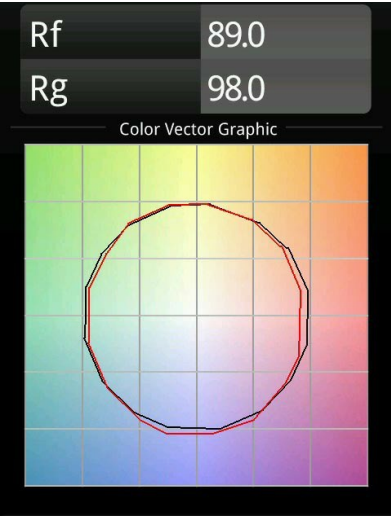


Light distribution & beam diagram

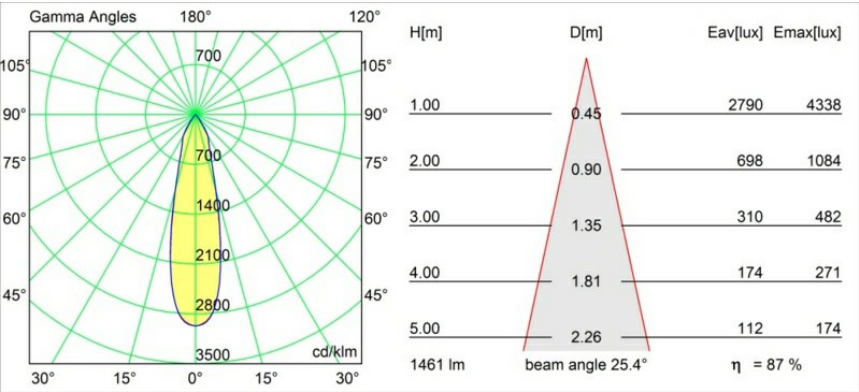


Diagrams

Installation Accessories



10490330 Installation Housing 172x112x100



12291330 Plaster Kit 170x112 - 65 1x

Choose a required accessory