



Date
Customer
Project
Type

Lotis Round Recessed 86 1x IP55 M-LED DE White Structure

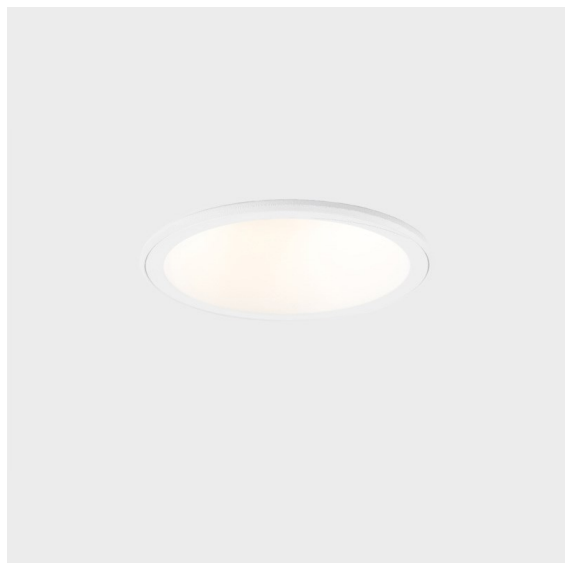


Lotis Round es un foco empotrado con un borde muy fino. Esta luminaria se caracteriza por su cono de empotrado profundo, que engloba la fuente de luz. Conocida por su diseño sencillo y alta funcionalidad, Lotis Round está disponible en distintos diámetros con diversos tipos de fuentes de luz.

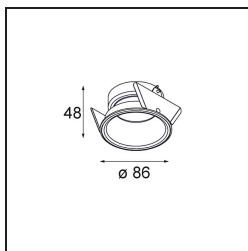

Specifications

Material	13090009
Tipo de fuente de luz	M-LED
Vida Útil	L80B20 @50.000 horas
Lámpara Incluida	No
Número de fuentes de luz	1
Dirección de la luz	Directo
Óptica	Reflector
Voltaje de entrada	Driver de corriente constante requerido
Clasificación eléctrica	III
Clasificación del IP	55
Clasificación de hilo incandescente (°C)	960
Interio/Exterior	Interior
Aplicación	Techo, Pared
Montaje	Empotrado
Tamaño de corte (mm)	ø79
Profundidad de montaje (mm)	95,0
Ajustabilidad	Not Applicable
Distancia al objeto iluminado (m)	0,1
Color principal & Acabado principal	Blanco, Estructura
Peso bruto (g)	161,0
Corriente de accionamiento (mA)	350
Flujo luminoso por lámpara (lm)	459
Eficacia (lm/W)	74
Remark	<ul style="list-style-type: none"> No es un producto completo. Se requiere módulo de luz.

Módulo M-LED



- **14060005** M-LED Module 50 1x LED 2700K Spot DE Aluminium Brushed Anodised
- **14060105** M-LED Module 50 1x LED 2700K Medium DE Aluminium Brushed Anodised
- **14060205** M-LED Module 50 1x LED 2700K Flood DE Aluminium Brushed Anodised
- **14060305** M-LED Module 50 1x LED 3000K Spot DE Aluminium Brushed Anodised
- **14060405** M-LED Module 50 1x LED 3000K Medium DE Aluminium Brushed Anodised
- **14060505** M-LED Module 50 1x LED 3000K Flood DE Aluminium Brushed Anodised
- **14060905** M-LED Module 50 1x LED 4000K Spot DE Aluminium Brushed Anodised
- **14061005** M-LED Module 50 1x LED 4000K Medium DE Aluminium Brushed Anodised
- **14061105** M-LED Module 50 1x LED 4000K Flood DE Aluminium Brushed Anodised
- **14061205** M-LED Module 50 1x LED 1800-3000K WD Spot DE Aluminium Brushed Anodised
- **14061305** M-LED Module 50 1x LED 1800-3000K WD Medium DE Aluminium Brushed Anodised
- **14061405** M-LED Module 50 1x LED 1800-3000K WD Flood DE Aluminium Brushed Anodised

Accesorios Instalación



- 10889830** Installation Housing 192x190x130
- 12290230** Plaster Kit 190X190 - 80 1x

■ Choose a required accessory