




Date
Customer
Project
Type

*Charlatan Track 230V Adjustable 100 1x LED 2700K DALI DI Black Structure*



A trackspot for our 230V track rail, Charlataan is an easy choice for spaces that need change. Its unpretentious, timeless design and excellent price/quality ratio make Charlataan ideal for several spaces. A thin, adjustable bracket. A flexibility of 360° horizontal and 90° vertical. A deeper-recessed reflector for visual comfort. With Charlataan, there's no compromise on quality or technology.

### Specifications



Material	13112432
Light Source Type	LED
LED Type	LUMILED 1211 GEN4
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 85
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Input Voltage	230V
Luminaire power (W)	34.5
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling
Adjustability	H 359° V -90°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1336.0
Luminous flux per lamp (lm)	3111
Efficacy (lm/W)	90
Glare rating	18
Remark	<ul style="list-style-type: none"><li>• 3500K on request</li><li>• Reflector not included</li><li>• 3500K on request</li><li>• Reflector not included</li><li>• This is not a complete product. Reflector and track 230V system required.</li><li>• This is not a complete product. Reflector and track 230V system required.</li></ul>




**MODULAR**  
LIGHTING —  
INSTRUMENTS

*Charlatan Track 230V Adjustable 100 lx LED 2700K DALI DI*

*Black Structure*

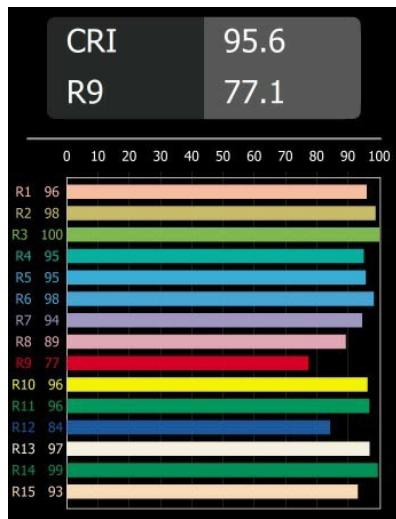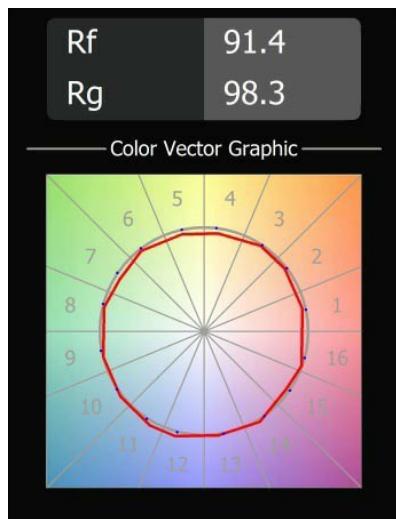**TM30 & CRI diagram**


## Optical Accessories



- **10210009** Reflector 100 Flood Aluminium Anodised
- **10210008** Reflector 100 Medium Aluminium Anodised
- **10210007** Reflector 100 Spot Aluminium Anodised

■ Choose a required accessory