


Date
Customer
Project
Type

FFD_Pista Linear Nightlight Track 48V 1136 1x LED 3000K DALI Black Structure


Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

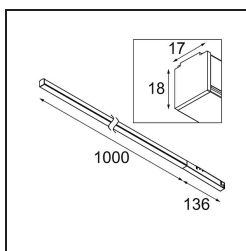


Specifications

Material	13417632
Light Source Type	LED
LED Type	PISTA LINEAR (FLAPS)
LED technology	LED flexible PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Light Direction	Down
Input Voltage	48Vdc
Luminaire power (W)	17.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	737.0
Delivered lumens (lm)	169
Efficacy (lm/W)	9
Glare rating	20
Remark	<ul style="list-style-type: none"> • 3500K and 4000K on request • This black Track 48V linear module comes with a black track adapter. Exceptions are only possible on request. • This is not a complete product. Pista track 48V system required. • For installations without dimmer, it is recommended to use 1-10 V luminaires.

TM30 & CRI diagram

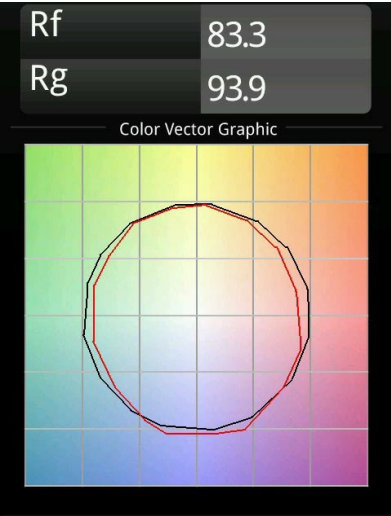

Light distribution & beam diagram

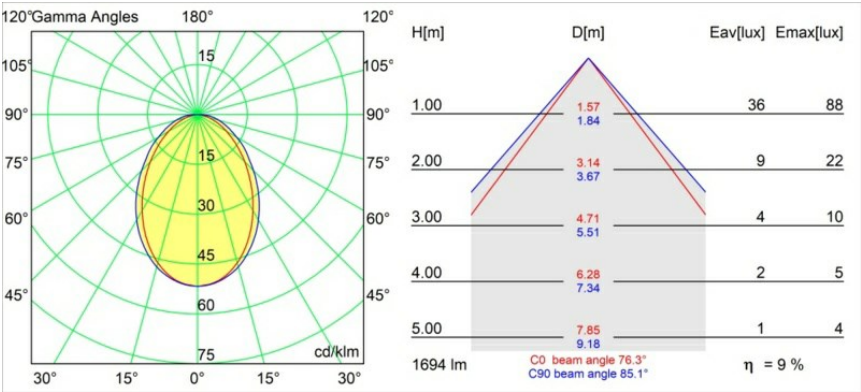

H[m]

D[m]

Eav[lux]

Emax[lux]

1.00	1.57	36	88
2.00	3.14	9	22
3.00	4.71	4	10
4.00	6.28	2	5
5.00	7.85	1	4

1694 lm

C0 beam angle 76.3°

C90 beam angle 85.1°

η = 9 %

