



Date
Customer
Project
Type

## FFD\_Pista Linear Light Flaps Track 48V 1636 1x LED 2700K DALI DI White Structure

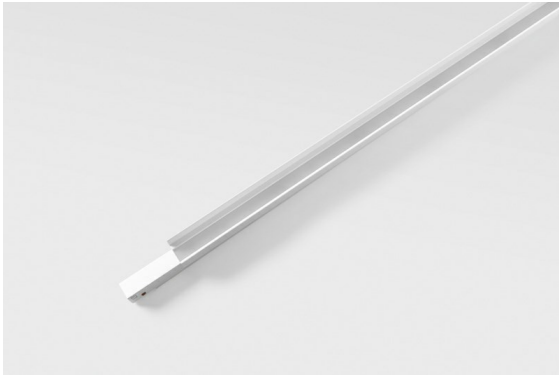

Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

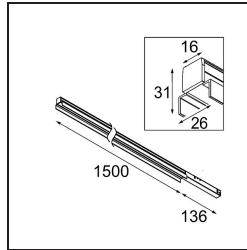

### Specifications


Material	13451209
Light Source Type	LED
LED Type	PISTA LINEAR (FLAPS)
LED technology	LED flexible PCB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	59 86 97 100 75
Binning (SDCM)	3
Light Direction	Down
Optic	Lens
Input Voltage	48Vdc
Luminaire power (W)	25.5
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	1451.0
Delivered lumens (lm)	1822
Efficacy (lm/W)	71
Glare rating	22
Remark	<ul style="list-style-type: none"> <li>• 3500K and 4000K on request</li> <li>• This white Track 48V linear module comes with a white track adapter. Exceptions are only possible on request.</li> <li>• This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.</li> <li>• This is not a complete product. Pista track 48V system required.</li> <li>• For installations without dimmer, it is</li> </ul>

---

recommended to use 1-10 V luminaires.

---

### TM30 & CRI diagram

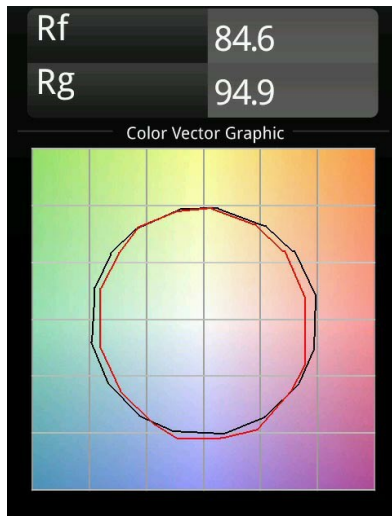

### Light distribution & beam diagram

