


Pate	
Customer	
Project	
уре	

Tetrix Cone Recessed 90 1x IP55 LED 2700K Medium DE Black Matt




Peeking out of the ceiling, Tetrix cone knows how to attract attention. Pair it with black or white optical accessories and make Tetrix Cone's prominent design even more interesting. And if you're looking to light wet and damp places, or a wellness environment, Tetrix Cone will do the trick, thanks to its IP55 rating.





~		a.		
Cn.	ocii	fico	tioi	20
יעכ	ヒしに	ucu	ıııor	ι s

Material	13513083			
Light Source Type	LED			
LED Type	BRIDGELUX V8G8			
LED technology	LED COB			
CRI	Min. 90			
Colour Temperature	2700K			
Lifetime	L90B10 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	1			
CIE flux code	100 100 100 100 95			
Binning (SDCM)	2			
Light Direction	Down			
Optic	Collimator			
Measured beam angle (°)	25.5			
Input Voltage	Constant Current Driver Required			
Electrical Class				
IP Rating	55			
Glow wire rating (°C)	850			
Indoor/Outdoor	Indoor			
Application	Ceiling, Wall			
Mounting	Recessed			
Cut-out size (mm)	ø68 for Frame Recessed; ø89 for Frame Recessed TrimLess			
Mounting depth (mm)	110.0			
Adjustability	Not Applicable			
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	Black, Matt			
Gross weight (g)	188.0			
Drive current (mA)	350	500		
Min. forward voltage (Vf)	13,2	13,7		
Max. forward voltage (Vf)	15,0	15,4		
Connected load (W)	5,0	7,2		
Luminous flux per lamp (lm)	466	627		
Eff: (1 0.4.1)		0.7		
Efficacy (lm/W)	93	87		





Remark

- Tetrix Recessed Ring or Tube Surface not included
- This is not a complete product. Tetrix Recessed Ring or Tube Surface required.
- This is not a complete product. Tetrix Recessed Ring or Tube Surface required.




TM30 & CRI diagram






Light distribution & beam diagram

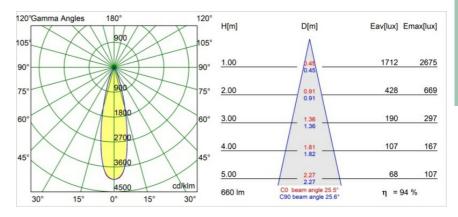





Optical Accessories



13515038 Snoot 32 White Matt **13515032** Snoot 32 Black Structure




13515132 Honeycomb 33 Black Structure




13515232 Light Cone 44 Black Structure 13515238 Light Cone 44 White Matt

Installation Accessories




13510083 Ring Recessed 62 1x IP55 Black Matt13510038 Ring Recessed 62 1x IP55 White Matt




13515430 Ring Recessed Trimless 62 1x







13515530 Concrete Kit 62 150x150 1x




13515630 Concrete Ring 62 Standard Installation Housing



12293230 Plaster Kit Trimless 150x150 - 62 1x



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150

Choose a required accessory