


Date
Customer
Project
Type

FFD_Rektor Surface Adjustable 78x78 2x LED 2700K Flood Trailing Edge DI White Structure - Aluminium Anodised



With a name derived from the Latin word for “ruler”, the Rektor family has all the qualities of a leader. Strong, guiding, and arguably a good listener. Winner of the 2014 Henry Van de Velde design award, Rektor is an orientable downlighter that showcases the distinguished effects of right angles and accented light direction.




Specifications

Material	14246161
Light Source Type	LED
LED Type	BRIDGELUX VERO13
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	38.6
Input Voltage	230V
Luminaire power (W)	25.7
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	H 360° V -90°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Secondary Colour & Secondary Finish	Aluminium, Anodised
Gross weight (g)	2261.0
Luminous flux per lamp (lm)	900
Efficacy (lm/W)	70
Glare rating	21

TM30 & CRI diagram



Light distribution & beam diagram

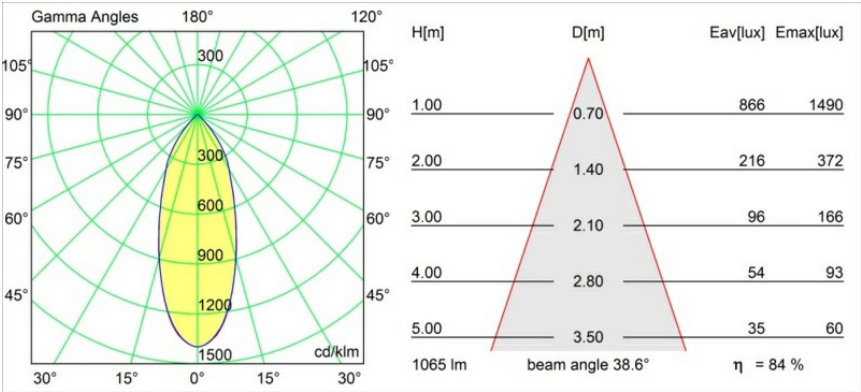

Diagrams